



INSTALLATION AND MAINTENANCE SPACE

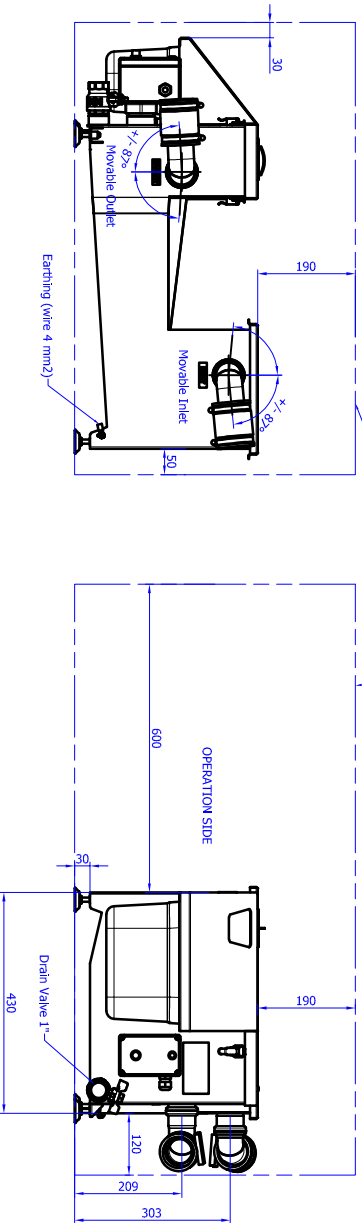

Inlet Push-fit system 50 mm (ACO pipe, HT)
+ flexible coupling 1.5" (OD 38 - 50 mm)
or 2.0" (OD 48 - 60 mm)

Outlet Push-fit system 50 mm (ACO pipe HT)
+ flexible coupling 1.5" (OD 38 - 50 mm)
or 2.0" (OD 48 - 60 mm)

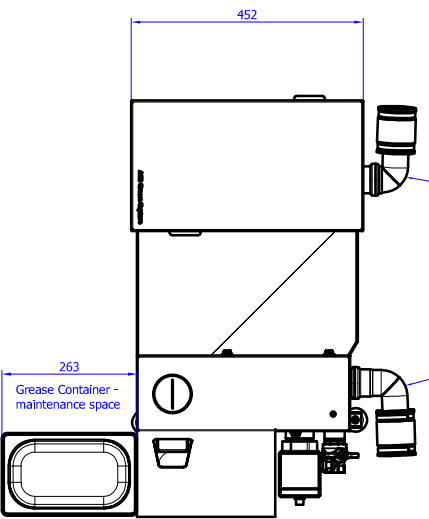

		ACO Grease Capture 100	
ACO Grease Capture 100 <small>ACO Grease Capture 100</small>	ISO 2788 - 1m - 2L 418502.10.23.C2	EN ISO 15920 - A 418502.10.23.C2	30,85 kg 1:3
ACO GRID <small>ACO Grease Capture 100</small>	153,3099	153,3099	AI